

| Track rail length | Set / Each | | | | | | | |
|-------------------|------------|---|---|----|---|---|--|--|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | | |
| 118 1/8" | 2 | 4 | 4 | 8 | 1 | 2 | | |
| 144" | 2 | 4 | 4 | 8 | 1 | 2 | | |
| 192" | 2 | 4 | 4 | 10 | 1 | 2 | | |

Beyerle US L.L.C., ABP-Beyerle, it's subsidiaries and agents are not responsible or liable for damage or injury to any persons or property due to improper installation of it's products. All liabilities reside solely with the installer.

Comply with all general safety regulations when installing the sliding door fittings!


> Installation to be completed by qualified licensed contractor.

Be sure to tighten all screw connections one week after starting to use the sliding door fittings!

Neveruse scouring agents to clean the sliding door fittings; rather use commercially available stainlesssteel cleaners!

ABP beyerle

Beyerle US L.L.C. 5126 South Royal Atlanta Drive, Tucker, GA 30084, USA Phone (770) 349 - 6324, Fax (770) 934 - 3384, mail: info@beyerle-us.com, www.beyerle-us.com

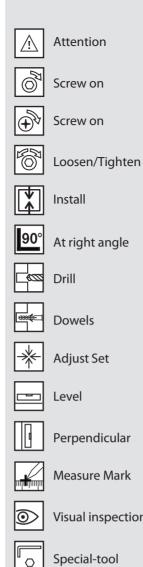

Visual inspection

2 people required

Measure

Clarify questions

See Instructions


55 30 00.0243_Flatec_VI_wood_Mont_US



Secure

Installation instructions Sliding door fittings Flatec VI

for 2 leaf wood doors (max. 1 - 3/4" inch)

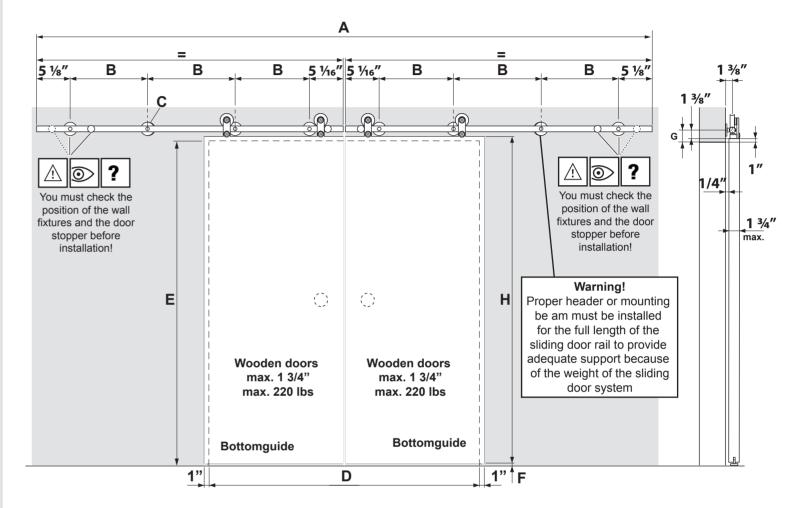

Complete-set's

| A Inch | B Inch | C Each | D Inch | E max. Inch | F Inch | G Inch | H max. Inch (H=E-F+1") |
|-----------|-----------|-----------|---------------|----------------|------------|-----------|------------------------------|
| 118 1/8" | 16 1/4" | 8 | 55 1/8" - 59" | 98 7/16" | 1/4"- 3/8" | 2 3/8" | 99 1/8" |
| 144" | 20 %16" | 8 | 59" - 70 %" | 98 7/16" | 1/4"- 3/8" | 2 3/8" | 99 1/8" |
| 192″ | 21 7/16" | 10 | 78 ¾" - 94 ½" | 98 7/16" | 1/4"- 3/8" | 2 3/8" | 99 1/8" |

